

**ADDENDUM NO. 2**  
**February 7, 2019**  
**ISLINGTON STREET CORRIDOR IMPROVEMENTS – PHASE 1**  
**PORTSMOUTH, NEW HAMPSHIRE**

The following changes and information are hereby incorporated into the Contract Documents (Project Manual and Drawings).

**DRAWINGS**

1. Sheet 76 of 88 – Utility Plan Notes


a. Water Key Note #5

**Delete** the note and **Replace** with the following:

“Existing water main outside proposed utility trenches shall be abandoned in place. See Watermain Abandonment Detail (Addendum #2, Attachment “A”), subsidiary to proposed utility installations. Removal of pipe within proposed utility trenches will be subsidiary to respective utility installations.


UNDERWOOD ENGINEERS, INC.

Daniel J. Rochette, P.E.  
Project Manager

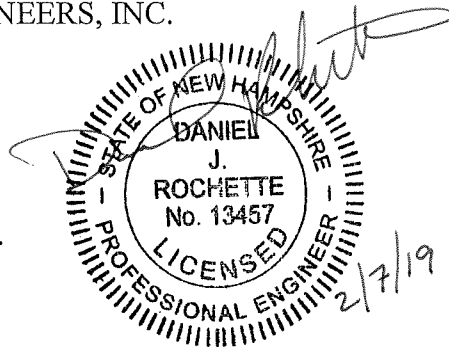

**Attachments:** Attachment “A” – Watermain Abandonment Detail

# Addendum # Z - Attachment "A"

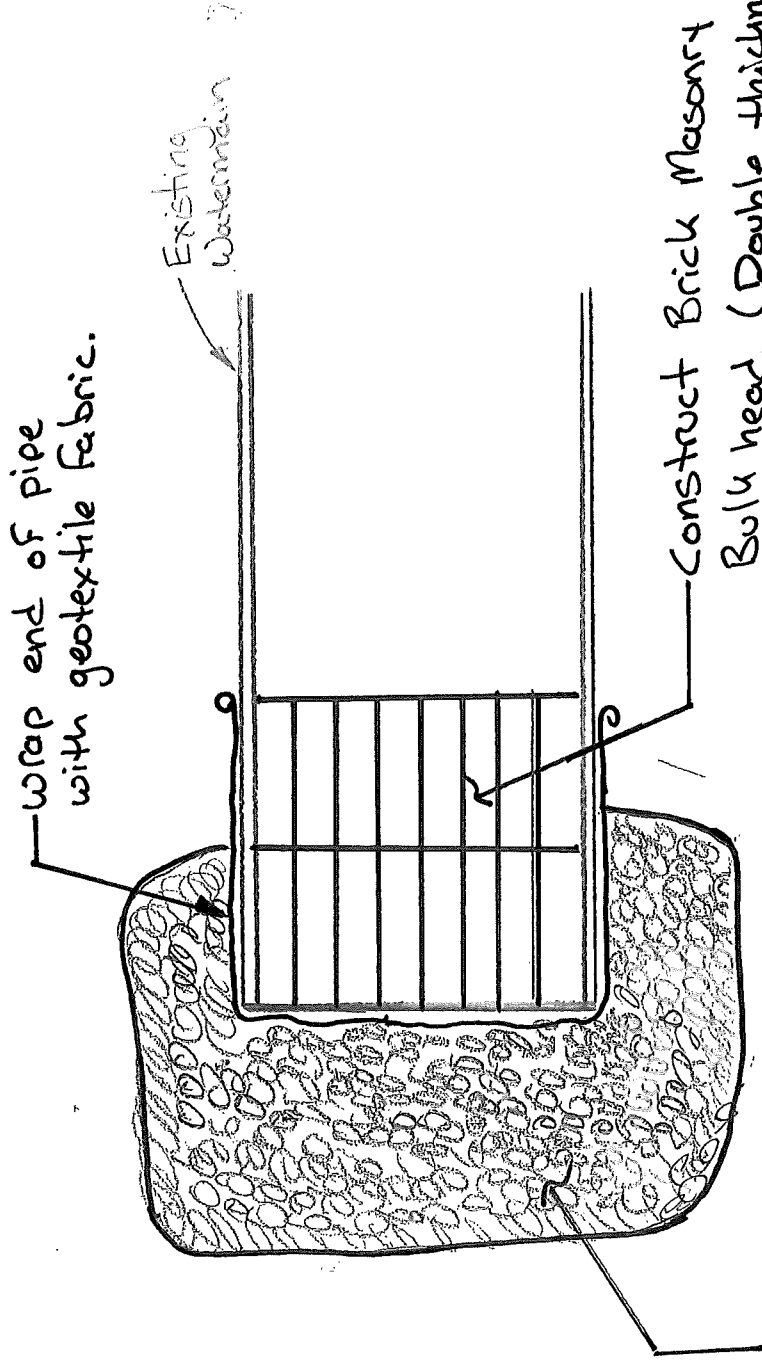

Watermain Abandonment Detail  
(Subsidiary)