Page 692 2009 Edition

## Notes for Figure 6H-30—Typical Application 30 Interior Lane Closure on a Multi-Lane Street

## Guidance:

1. This information applies to low-speed, low-volume urban streets. Where speed or volume is higher, additional signing such as LEFT LANE CLOSED XX FT should be used between the signs shown.


## Option:

- 2. The closure of the adjacent interior lane in the opposing direction may not be necessary, depending upon the activity being performed and the work space needed for the operation.
- 3. Shadow vehicles with a truck-mounted attenuator may be used.

Sect. 6H.01 December 2009

2009 Edition Page 693

Figure 6H-30. Interior Lane Closure on a Multi-Lane Street (TA-30)

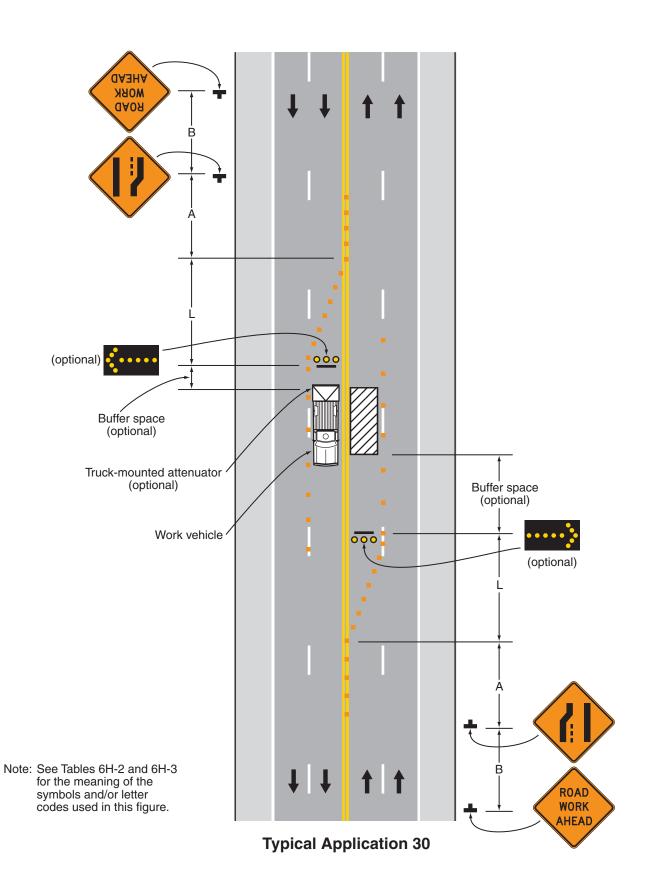

December 2009 Sect. 6H.01