

ADDENDUM NO. 3
September 14, 2023

**CORPORATE DRIVE RECONSTRUCTION
PORTSMOUTH, NEW HAMPSHIRE**

The following changes and information are hereby incorporated into the Contract Documents (Project Manual and Drawings).

PROJECT MANUAL

1. Section 110 – Prosecution of Work (110-8)

Add Paragraph 20. Surplus Soils to read as follows:


20. Surplus Soils

Any surplus soils generated from the project limits will be considered the property of Pease Development Authority (PDA) and will remain on PDA property. Soils may be temporarily stockpiled at the Jones Field Site and/or other available locations within Pease Trade Port as determined by the PDA. At the end of the work, soils stockpiled at Jones Field are to be spread across the vacant lot area and covered with the existing loam/organic material already on site and stabilized with turf (also see Staging Area Notes on Drawing G3 and Paragraph 15 in this specification section)

ATTACHMENTS

None

UNDERWOOD ENGINEERS, INC.

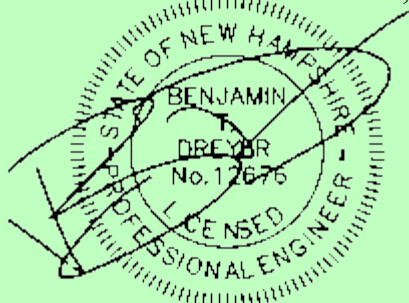

Benjamin T. Dreyer, P.E.
Senior Project Manager